


\* Idoneo al contatto con alimenti che richiedono un liquido simulante del tipo A-B-C secondo CE 1935/2004. Prove di migrazione eseguite a 40° C per 24 ore.  
 \* Suitable for the contact with foodstuff that requires a simulating liquid type A-B-C in accordance with 1935/2004 CE. Migration tests made at 40° C for 24 hours.

Ø interno Ø int. Ø interior. Ø intérieur	spessore parete wall thickness Espesor pared épaisseur paroi	peso weight Peso poids	press. eserc. working press. Presión trab. press. service	sottovuoto vacuum Vacío vide	raggio curv. bend. radius Radio curv. rayon courb.	lungh. rotoli coil length Longitud rollos long. couron.
mm.	mm.	gr./mtr.	bar a 20° C	m. H <sub>2</sub> O	mm.	mtr.
20	2,4	210	6,5	6	110	25
25	2,4	250	6,5	6	140	25
30	2,5	330	6	6	175	25
32	2,6	350	6	6	180	25
35	2,7	400	6	6	195	25
38	2,8	430	6	6	210	25
40	3	480	5,5	6	220	25
45	3,5	640	5,5	6	255	25
50	4	760	5,5	6	275	25
55	4,3	860	5,5	6	310	25
60	4,3	900	4	6	330	25
63	4,1	970	4	6	350	25
70	4,5	1125	3	6	450	25
75	4,7	1200	3	6	500	25
80	4,7	1450	3	6	550	25

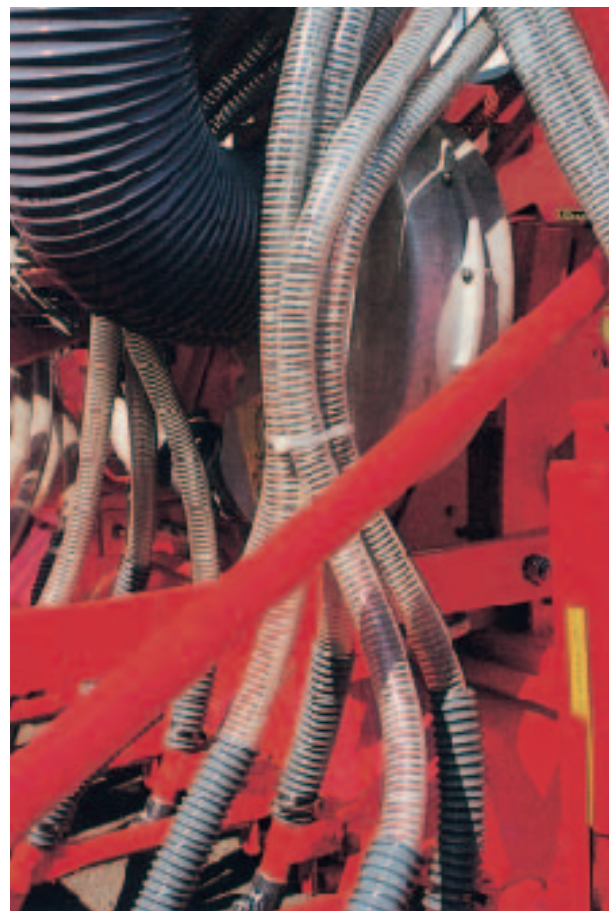


## CARATTERISTICHE

Flessibile. Temperatura: -5° C +60° C.  
 Flexible. Temperature range: -5° C +60° C.  
 Manguera flexible. Temperatura de trabajo: -5° C hasta +60° C.  
 Flexible. Température d'emploi: -5° C +60° C.


## USO

Mandata liquidi alimentari e alcoolici fino a 28° dove non ci siano particolari condizioni di uso gravose.  
 Suction and delivery of foodstuffs and drinks for standard handling of goods.  
 Manguera para impulsión de líquidos, e incluso alimentarios y alcoholes hasta 28°. Usos generales en condiciones severas.  
 Refoulement de produits alimentaires pour l'emploi en conditions normales de travail.

## STRUTTURA

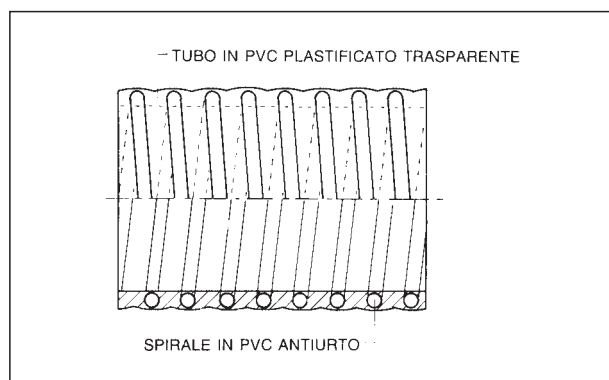

Spirale in PVC rigido antiurto. Interno liscio.  
 Rigid PVC spiral. Smooth inside. Light duty hose.  
 Espiral de PVC rígido antichoque. Interior liso.  
 Spirale en PVC rigide. Intérieur lisse pour travail léger.

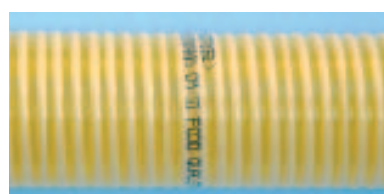

Versione in rotoli da 50 m dal ø20 mm al ø75 mm.  
 Version in 50 m coil from ø20 mm to ø75 mm.  
 Versión en rollos de 50 mts., desde el diam. 20 mm hasta 75 mm.  
 Version en couronnes de 50 m du ø20 mm au ø75 mm.

\* Idoneo al contatto con alimenti che richiedono un liquido simulante del tipo A-B-C secondo CE 1935/2004. Prove di migrazione eseguite a 40° C per 24 ore.  
 \* Suitable for the contact with foodstuff that requires a simulating liquid type A-B-C in accordance with 1935/2004 CE. Migration tests made at 40° C for 24 hours.