



* Idoneo al contatto con alimenti che richiedono un liquido simulante del tipo A-B-C secondo CE 1935/2004. Prove di migrazione eseguite a 40° C per 24 ore.

* Suitable for the contact with foodstuff that requires a simulating liquid type A-B-C in accordance with 1935/2004 CE. Migration tests made at 40° C for 24 hours.

Ø int. I. D. Ø int. Ø int. mm.	Ø est. O. D. Ø ext. Ø est. mm.	peso weight Peso poids gr./mtr.	raggio curv. bending radius Radio curv. rayon courb. mm.	lungh. rotoli coil length Long. rotols long. couronnes mtr.
3	6	25	24	200
4	6	19	32	200
4	7	32	32	200
5	8	35	40	200
6	9	44	48	200
7	10	50	56	100
8	12	80	64	100
10	14	90	80	100
12	17	140	120	100
13	19	190	130	100
14	19	160	140	100
16	22	215	160	100
18	25	290	180	50
20	27	320	200	50
22	30	380	220	50
25	34	500	250	50
30	40	680	300	30
35	45	760	350	30
40	50	900	400	30
50	60	1200	500	30



CARATTERISTICHE

Prodotto con materiale resistente alle basse temperature con trasparenza cristallina.

Made with a cristal-clear material resistant to low temperatures.

Fabricado con material resistente a las bajas temperaturas con transparencia cristalina.

Produit avec un matériel transparent résistant aux basses températures.

USO


Passaggio liquidi in genere. Adatto a rilevare livelli in edilizia. Industria in genere.

Delivery of liquids. Industry. To be used as level.

Impulsión de líquidos en general. Adaptado a establecer niveles en la construcción. Industria en general.

Passage de liquides. Industrie. A utiliser comme niveau.

STRUTTURA

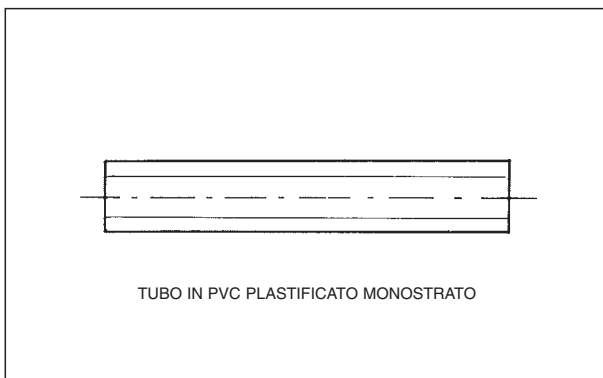

Tubo in PVC plastificato monostrato.

One-layer soft PVC.

Tubo de PVC plastificado monostrato.

PVC souple à une seule couche.