



CARATTERISTICHE

Leggero, resistente alle abrasioni e perforazioni, buona resistenza agli agenti atmosferici. Temperatura: -40° C +60° C.

Light weight, resistant to abrasion and perforations, good resistance to atmospheric agents. Temperature range: -40° C +60° C.

Ligera, resistente a la abrasión y perforación accidental, buena resistencia a los agentes atmosféricos. Temperatura: -40°C hasta +60°C.

Léger, résistant à l'abrasion et à la perforation, bonne tenue aux agents atmosphériques. Température: -40° C +60°C.



USO

Passaggio aria compressa. Per impiantistica industriale pneumatica in genere. Per macchine agricole a comando pneumatico: forbici, seghe ecc.


Delivery of compressed air. For industrial and pneumatic plants. For agricultural tools with pneumatic control.

Paso de aire comprimido. Para instalaciones industriales neumáticas en general. Para máquinas agrícolas de funcionamiento neumático, como tijeras de podar, sierras, etc.

Application: air comprimé. Pour installations pneumatiques industrielles. Pour des machines-outils agricoles avec commande pneumatique: ciseaux, scies etc.

Ø int. I. D. Ø int. Ø int. mm.	Ø est. O. D. Ø Ext Ø est. mm	raggio curv. bending radius Radio curv. rayon courb. mm.	peso weight Peso poids gr./mtr.	press. es. work. press. Presión trab. press. serv. bar a 20° C	press. sc. burst. press. Presión rev. press. éclat. bar	lung. rotoli coil length Long. rollos long. couron. mtr.
4	6	30	20	18	54	100
5,5	8	40	32	12	36	100
7,5	10	50	42	10	30	100

STRUTTURA

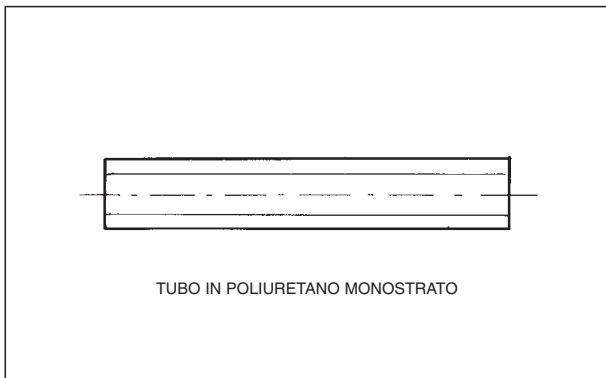

In poliuretano durezza shore A 98. Colore azzurro.
Polyurethane hose, Shore hardness A 98. Colour: light blue.
De poliuretano durezza shore A 98. Color azul.
Tuyau en polyurethane, dureté Shore A 98. Coloris: bleu clair.