

CARATTERISTICHE


Aspetto e morbidezza tipo gomma. Ottima resistenza a basse temperature ed agli oli.

Performance, look and softness like conventional rubber.

Excellent resistance at low temperature and to oils.

Aspecto mate tipo caucho. Óptima resistencia a las bajas temperaturas y a los aceites.

Aspect et souplesse genre caoutchouc. Excellente résistance aux basses températures et aux huiles.

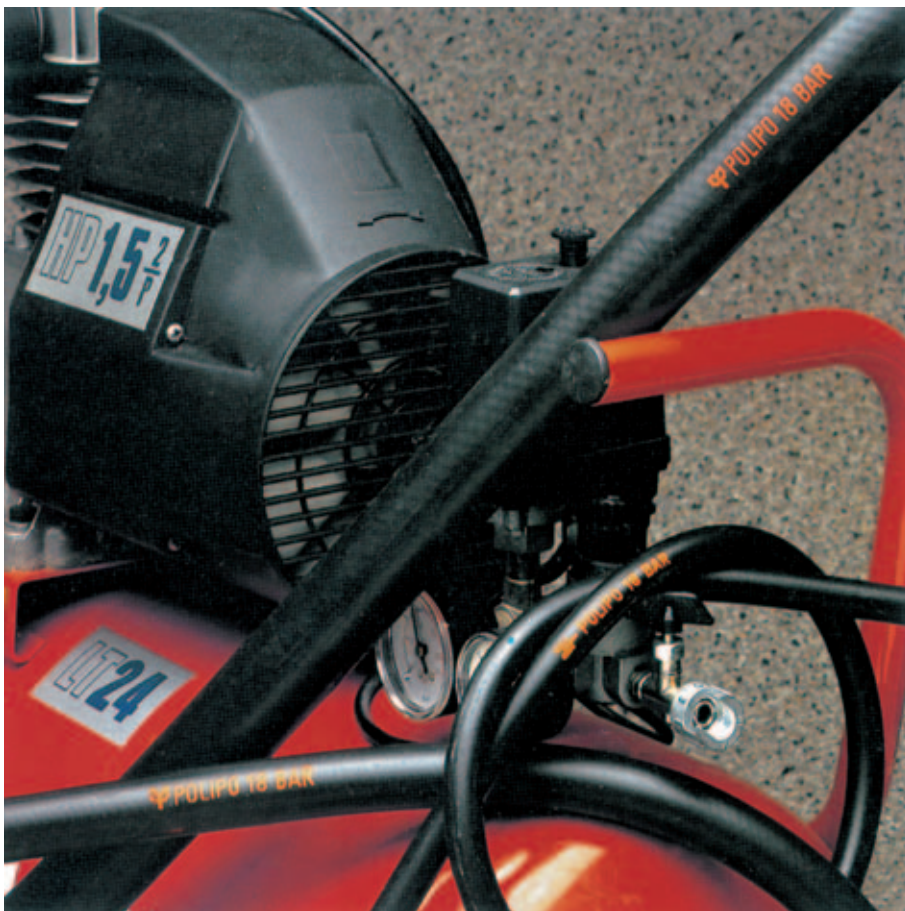

USO

Aria compressa.


Application: compressed air.

Aire comprimido a 18 bar.

Utilisation: air comprimé.

Ø int. I. D. Ø int. mm.	Ø est. O. D. Ø ext. mm.	press. esercizio / working pressure Presión trab. / pression service bar			lungh. rotoli coil length Long. rollos long. couronnes mtr.
		20° C bar	40° C bar	60° C bar	
6	14	20	18	16	100
7	16	20	18	16	100
8	17	20	18	16	100
10	19	18	16	14	100
13	23	18	16	14	100
16	26	18	16	14	100
19	30	15	11	7	60
25	37	15	11	7	60

STRUTTURA

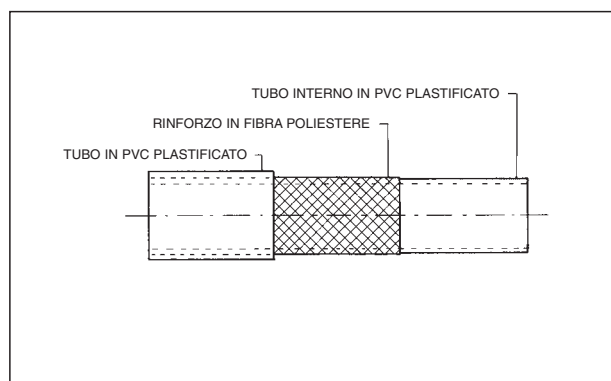

In formulazione plastica speciale con rinforzo in fibra poliestere.
Made in special plastics compound with polyester yarn reinforcement

PVC plastificato color negro con refuerzo interior de fibra de poliester.

Formule spéciale plastique avec renforcement en fil polyester.