



CARATTERISTICHE

Aspetto e morbidezza tipo gomma. Ottima resistenza agli oli. Buona resistenza all'abrasione.

Performance, look and softness like conventional rubber.

Excellent resistance to oils. Good abrasion resistance.

Aspecto mate tipo caucho. Óptima resistencia a los aceites. Buena resistencia a la abrasión.

Aspect et souplesse similaire au caoutchouc.

Excellente résistance aux huiles. Bonne résistance à l'abrasion.

USO

Aria compressa.


Applications: compressed air.

Aire comprimido a 10 bar.

Utilisation: air comprimé.

Ø int. I. D. Ø int. Ø int. mm.	Ø est. O. D. Ø ext. Ø ext. mm.	press. esercizio / working pressure Presión trab. / pression service bar			lungh. rotoli coil length Long. rollos long. couronnes mtr.
		20° C bar	40° C bar	60° C bar	
5	10,5	15	11	7	100
6	12	15	11	7	100
8	15	15	11	7	100
10	15	15	11	7	100
12	17	15	11	7	100
13	19	10	7	4	100
15	21	10	7	4	100
16	23	10	7	4	100
19	26	10	7	4	60
25	33	10	7	4	60

STRUTTURA

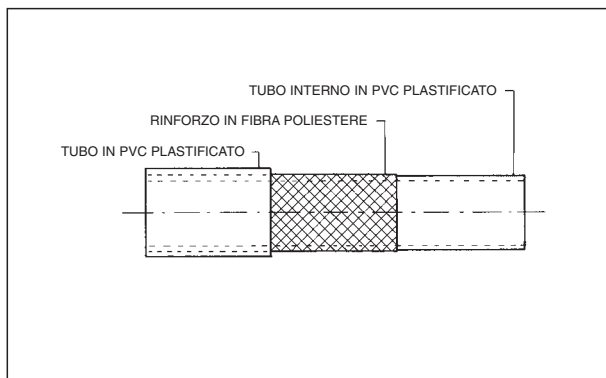

In formulazione plastica speciale con rinforzo in fibra poliestere.
Braiding reinforced hose made of a special plastics formulation.
PVC plastificado color negro con refuerzo interior de fibra de poliester.

Formule spéciale plastique avec renforcement en fil polyester.