



Ø int. I. D. Ø int. Ø int. mm.	Ø est. O. D. Ø ext. Ø ext. mm.	peso weight Peso poids gr./mtr.	press. es. work. press. Presión trab. press. serv. bar a 20° C	press. sc. burst. press. Presión rev. press. éclat. bar	lung. rotoli coil length Long. rollos long. couron. mtr.
10	15	125	8	24	50
12	16	110	6	18	50
13	18	155	8	24	50
13	19	180	8	24	50
15	18,5	125	6	18	50
16	21	190	8	24	50
16	22	230	8	24	50
18	23,4	230	6	18	50
19	25	275	7	21	50
19	26	310	7	21	50
22	29	370	7	21	50
25	32	400	6	18	50
25	33	460	6	18	50
30	38	560	6	18	50
35	45	700	5	15	50
40	50	840	4	12	50
50	60	1300	4	12	25

CARATTERISTICHE

Tubo flessibile resistente agli agenti atmosferici. Temperatura: -5° C +60° C.

Flexible hose resistant to weather conditions. Temperature range: -5° C +60° C.

Manguera flexible y resistente a los agentes atmosféricos. Temperatura de trabajo: -5°C hasta +60°C

Tuyau flexible résistant à l'action des agents atmosphériques. Température d'emploi: -5° C +60° C.

USO


Passaggio acqua per fioricoltura e agricoltura.

Applications: water delivery.

Impulsión de agua en floricultura y agricultura.

Utilisations: refoulement d'eau.

STRUTTURA

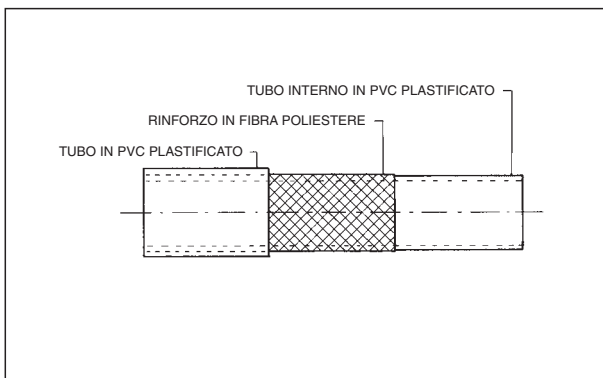

PVC plastificato con rinforzo interno in fibra poliester.

Soft PVC hose with polyester yarn reinforcement.

PVC plastificado con refuerzo interno en fibra de poliester.

Tuyau en PVC souple avec renforcement en fil polyester.