



Suitable for the contact with foodstuff that requires a simulating liquid type A-B-C in accordance with CE 1935/2004. Migration tests made at 40° C for 24 hours.

Ø int. I. D. Innen Ø I.D. mm.	wanddikte wall thickness Wandstärke Vegtykkelse mm.	gewicht weight Gewicht Vekt gr./mtr.	buigradius bending radius Biegeradius Boyeradius mm.	werkdruk working pressure Betriebsdruck Arb.trykk bar a 23° C	vacuum vacuum Unterdruck Vacum m. H ₂ O	rollengte coil length Rollenlänge Std.lengde mtr.
10	3	155	20	7	8,5	60
12	3	180	25	7	8,5	60
14	3	200	30	6	8,5	60
16	3	225	35	6	8,5	60
18	3,25	280	40	6	8,5	60
20	3,5	340	50	5	8,5	60
22	3,5	360	55	5	8,5	60
25	4	510	60	5	8,5	60
30	4,5	600	70	4,5	8,5	60
32	4,5	650	75	4,5	8,5	60
35	4,5	730	80	4	8,5	60
38	4,5	800	90	4	8,5	30
40	4,75	870	95	3	8,5	30
45	5	1100	110	3	8	30
50	5	1200	125	3	8	30
60	6	1800	140	2,5	8	30
75	7	2500	200	2	7	30
80	7	2700	220	2	7	30
100	7	3250	300	2	7	30



CHARACTERISTICS

Zeer flexibele slang , sterk , slijtvast, gladde binnen- en buitenwand.
Temperatuur bereik: -5° C - +65° C.

Very flexible, strong, abrasion resistant, smooth inside and outside.
Temperature range: -5° C +65° C.

Hochflexibel, robust, abriebfest, innen und aussen glatt. Temperaturbereich: -5° C +65° C.

Meget fleksibel og slitesterk slange. Temp.område: -5° C +65° C. Næringsmiddelkvalitet.

USE



Zuigen van levensmiddelen, en tot 28% alcoholhoudende dranken.

Applications: suction of foodstuffs, drinks up to 28% alcohol contents.

Anwendung: als Saugschlauch von Lebensmitteln, Getränken bis 28% Alkohol.

Lett suge-/trykkslange for næringsmiddelindustrien, granulat og transport av væsker hvor liten bøyeradius er viktig. Alkoholbestandighet 28%.

STRUCTURE

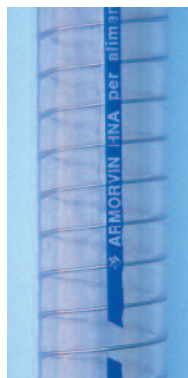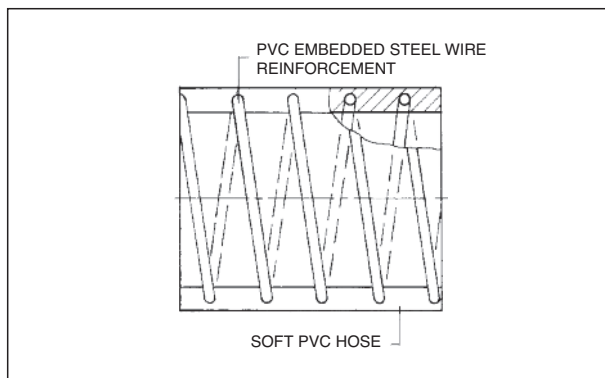

Zachte PVC slang met ingesloten stalen spiraal. Transparant. Lichte uitvoering.

Soft PVC hose with embedded steel wire reinforcement. Clear transparent. Lightweight quality.

Weich-PVC-Schlauch mit eingebetteter Stahldrahtspirale. Glassklar. Leichte Ausführung.

PVC inn- og utvendig. Stålspiral. Glatt inn- og utvendig. Transparent.