



Suitable for the contact with foodstuff that requires a simulating liquid type A-B-C in accordance CE 1935/2004. Migration tests made at 40° C for 24 hours.

Ø int. I. D. Innen Ø I.D. mm.	wanddikte wall thickness Wandstärke Veggykkelse mm.	gewicht weight Gewicht Vekt gr./mtr.	buigradius bending radius Biegeradius Boyeradius mm.		vacuum vacuum Unterdruck Vacum m. H ₂ O		werkdruk working pressure Betriebsdruck Arb. trykk bar a 23° C		barstdruk bursting pressure Berstdruck Spr. trykk bar a 23° C		rollenlge coil length Rollenlänge Std.lengde mtr.
			L.	LS.	L.	LS.	L.	LS.	L.	LS.	
			20	3,1	275	75	65	7	7	8	
25	3,3	330	120	100	7	7	8	6,5	24	19,5	50
30	3,5	420	140	125	7	7	7	5,5	21	16,5	50
32	3,6	460	150	135	7	7	7	5,5	21	16,5	50
35	3,4	500	160	145	7	7	7	5	21	15	50
38	3,7	550	170	155	7	7	6,5	4,5	19,5	13,5	50
40	3,8	610	180	160	7	7	6,5	4,5	19,5	13,5	50
45	3,7	670	200	180	7	7	6,5	4	19,5	12	50
50	4,1	810	220	200	7	7	6	3,5	18	10,5	50
60	4,5	970	270	245	7	7	5	3,5	15	10,5	50
63	4,0	1040	290	260	7	7	5	3,5	15	10,5	50
70	4,6	1200	320		7		4		12		50
75	5,2	1380	350	315	7	7	4	2,5	12	7,5	50
80	5,3	1560	360		7		4		12		25
90	5,2	1800	430		7		4		12		25
100	6,0	2160	480		7		4		12		25
102**	6,2	2160	480	430	7	7	4	2,5	12	7,5	25
110	6,0	2400	530		6		4		12		25
120	6,2	2850	680		6		3		9		25
125	6,3	3130	730		6		3		9		25
127	6,8	3130		670		5		2		6	25
150	7,2	4250	810		5		3		9		25
152	7,4	4250		750		5		2		6	25
200	9,1	6400	900		5		2		6		10




CHARACTERISTICS

Flexibele slang met een temperatuur bereik van -5° + 60° C.
Flexible hose. Temperature range: -5° C +60° C.
 Flexibler Schlauch. Temperaturbereich: -5° C +60° C.
 Fleksibel slange. Temp.område: -5° C +60° C. Næringsmiddelkvalitet.

USE


Doorvoer van levensmiddelen en tot 28% alcoholhoudende dranken.
Applications: discharge of foodstuffs and drinks.
 Anwendung: zum Durchleiten von Getränken und Lebensmitteln.
 Lett suge-/trykkslange for transport av matvarer og flytende væske.
 Alkoholbestandighet 28%.

STRUCTURE

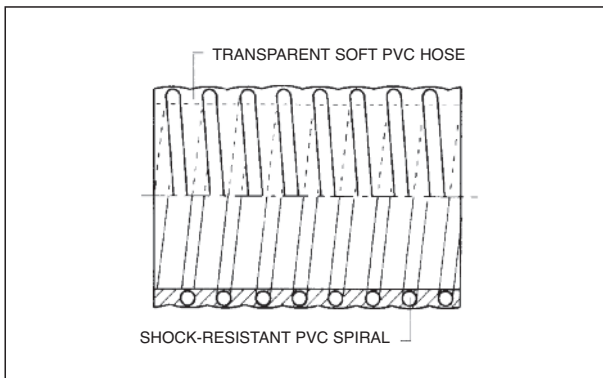

Schockbestendige hard-PVC spiraal. Gladde binnenkant. **Ook ver-krijgbaar in antistatische uitvoering**.**
Shock-resistant rigid PVC spiral. Smooth inside. Available also in antistatic version.**
 Stoffsfeite hart-PVC-Spirale. Innen glatt. **Verfügbar auch in antistatischer Ausführung**.**
 PVC inn- og utvendig. Herdet PVC spiral. **Glatt innvendig. Transparent**.**

** Only on request for quantities to be agreed.

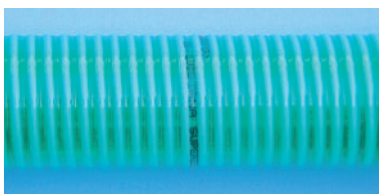

Superelastische uitvoering is flexibeler. Temperatuur bereik: -25° C +55° C.
Superelastic version more flexible. Temperature range: -25° C +55° C.
 Flexiblere Superelastische-Ausführung. Temperaturbereich: -25° C +55° C.
 Superelastisk utførelse. Temp.område: -25° C +55° C. PVC inn- og utvendig. Transparent.