



## TEXOIL A\*\*

Ø int. I. D. Innen Ø I.D. mm.	wanddikte wall thickness Wandstärke Veggykkelse mm.	gewicht weight Gewicht Vekt gr./mtr.	buigradius bending radius Biegeradius Bøyeradius mm.	vacuum vacuum Unterdruck Vacuum m. H <sub>2</sub> O	werkdruk working pressure Betriebsdruck Arb.trykk bar a 23° C	barstdruk bursting pressure Berstdruck Spr.trykk bar a 23° C	rollengte coil length Rollenlänge Std.lengde mtr.
25	4,5	540	160	9	9	27	50
30	4,5	680	180	9	7	21	50
32	4,5	700	190	9	7	21	50
35	4,5	750	210	9	7	21	50
38	4,5	800	230	9	7	21	50
40	4,5	850	240	9	7	21	50
45	5,5	1000	260	9	6	18	50
50	5,8	1200	290	9	6	18	50
60	6,5	1700	350	9	6	18	50
63	6,5	1700	360	9	6	18	50
70	6,5	1900	410	9	6	18	50
75	6,5	2000	450	9	6	18	50
80	7	2200	490	9	5	15	50
90	7,2	2600	560	9	4	12	30
100	7,5	3300	640	9	4	12	30

## AMERICA OIL\*\* - AMERICA OIL A \*\*

Ø int. I. D. Innen Ø I.D. mm.	wanddikte wall thickness Wandstärke Veggykkelse mm.	gewicht weight Gewicht Vekt gr./mtr.	buigradius bending radius Biegeradius Bøyeradius mm.	vacuum vacuum Unterdruck Vacuum m. H <sub>2</sub> O	werkdruk working pressure Betriebsdruck Arb.trykk bar a 23° C	barstdruk bursting pressure Berstdruck Spr.trykk bar a 23° C	rollengte coil length Rollenlänge Std.lengde mtr.
25	4,5	480	90	9	6	18	50
32	4,7	580	115	9	5	15	50
38	4,8	680	135	9	5	15	50
51	5,5	1050	175	9	4,5	13,5	50
63	6	1390	220	9	4	12	50
76	6,4	1700	270	9	3,5	10,5	50
102	7,4	2700	360	9	2,5	7,5	30
152	9	5000	530	9	1,5	4,5	30

\*\* Only on request for quantities to be agreed.




## STRUCTURE

### TEXOIL COD. 911060




Hard-PVC spiraal. Gladde binnenwand.  
Rigid PVC spiral. Smooth inside.  
Hart-PVC-Spirale. Innen glatt.  
PVC inn- og utvendig. Herdet PVC spiral.  
Glatt innvendig.

### TEXOIL A\*\* COD. 911061

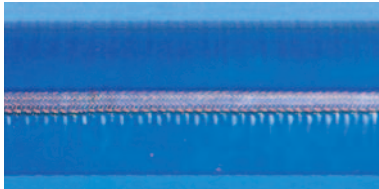


Verkrijgbaar in antistatische uitvoering, met antistatische draad in de lengterichting.  
Antistatic version.  
Antistatische Ausführung.  
Antistatisk versjon.

### AMERICA OIL\*\* COD. 911101

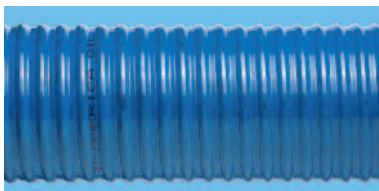

Hard-PVC spiraal. Gladde binnenwand.  
Rigid PVC spiral. Smooth inside.  
Hart-PVC-Spirale. Innen glatt.  
PVC inn- og utvendig. Herdet PVC spiral.  
Glatt innvendig.

### AMERICA OIL A\*\* COD. 911189

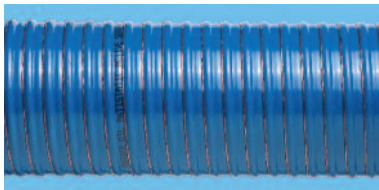

Verkrijgbaar in antistatische uitvoering, met antistatische draad in de lengterichting.  
Antistatic version.  
Antistatische Ausführung.  
Antistatisk versjon.

## CHARACTERISTICS

### TEXOIL - TEXOIL A

Flexibele slang. Temperatuur bereik: -10° C - +60° C.  
Flexible hose. Temperature range: -10° C +60° C  
Flexibler Schlauch. Temperaturbereich: -10° C +60° C  
Flexibel slange. Temp.område: -10° C +60° C.

### AMERICA OIL - AMERICA OIL A

Flexibele slang. Temperatuur bereik: -20° C +55° C.  
Flexible hose. Temperature range: -20° C +55° C  
Flexibler Schlauch. Temperaturbereich: -20° C +55° C  
Flexibel slange. Temp.område: -20° C +55° C.

## USE

Zuigen en persen van mineraal olie.  
Applications: suction and discharge of oil based liquids.  
Anwendung: zum Durchleiten von Mineralöl, Heizöl.  
Kraftig suge-/trykkslange for transport av oljer og kjemikalier.

