



Ø int. I. D. Innen Ø I.D. mm.	Ø ext. O. D. Aussen Ø U.D. mm.	gewicht weight Gewicht Vekt gr./mtr.	buigradius bending radius Biegeradius Boyeradius mm.	rollenlge coil length Rollenlänge Std.lengde mtr.
16	19	53	19	100
20	25	65	25	100
26	31	70	31	50
28	34	75	34	100
32	38	105	38	100
35	41	110	41	100
40	46	125	46	100
45	52	150	52	100
50	57	195	57	100
60	67	240	67	50
70	77	280	77	50
80	88	350	88	50
90	99	400	99	25
100	109	440	109	25
120	129	555	129	25




CHARACTERISTICS

Temperatuur bereik: -5° C +100° C.
 Temperature range: -5° C +100° C
 Temperaturbereich: -5° C +100° C
 Temp.område: -5° C +100° C.

USE

Klimaatbeheersing, afzuiging van stof en gas, verwarmingsinstallaties voor de auto industrie.
 Applications: conditioning plants, extraction of dust and fumes, automobile industry for car airing installations.
 Anwendung: Klimaanlagen, zur Absaugung von Staub und Dampf, Klimaanlagen für Automobilindustrie.
 Avsug og ventilasjonslange for bil- og annen industri.

STRUCTURE

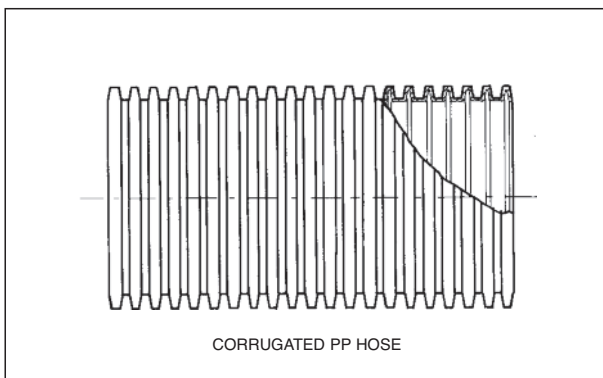

Polypropileen, gegolfd zonder inlage.
 Made of polypropilen, corrugated, unreinforced.
 Aus Polypropilen, gewellt, unverstärkt.
 Slange i polypropilen, korrugert inn- og utvendig. Uarmert.