



**VLAMDOVEND VOLGENS UL 94 VO**  
**SELF EXTINGUISHING TO UL 94 VO**  
**SELBSTLÖSCHEND NACH UL 94 VO**  
**SELVSLUKKENDE I HHT. UL 94 VO**

Ø int. I. D. Innen Ø I.D. mm.	Ø ext. O. D. Aussen Ø U.D. mm.	gewicht weight Gewicht Vekt gr/mtr.	buigradius bending radius Biegeradius Boyeradius mm.	vacuum vacuum Unterdruck Vacum m. H <sub>2</sub> O	rollengte coil length Rollenlänge Std.lengde mtr.
10	15,5	115	15	3	80
12	17,5	135	17	3	80
14	19,5	140	19	3	80
16	21,3	160	21	3	80
18	23,3	175	23	3	80
20	25,6	190	25	3	80
22	27,6	200	27	3	80
24	30,3	230	29	3	80
26	32,3	240	31	3	80
28	34,3	260	33	3	80
30	36,3	280	35	3	80
32	38,8	300	38	3	50
35	41,3	300	41	3	50
38	45,4	400	45	3	50
40	47,5	430	47	3	50
45	52,5	470	52	3	50
50	57,5	530	57	2,5	50
60	67,5	630	67	2,5	50
70	78,5	670	77	2,5	30
75	83,5	730	82	2,5	30
80	88,5	800	87	2,5	30
90	98,5	850	97	2,5	30
100	110,5	1200	108	2,5	30
110	120,5	1300	118	2,5	30
120	131	1360	128	2,5	30
125	136	1420	133	2,5	30
130	141	1500	138	1,2	30
140	151	1700	148	1,2	30
150	161	1750	158	1,2	30
160	171	1800	168	1,2	30
170	181	2050	178	1,2	30
180	191	2150	188	1,2	30
200	212	2250	208	1	30
220	233	2900	228	1	10
250	263	3150	260	1	—
300	314	3800	310	0,5	—
350	364	4550	360	0,5	—
400	414	5000	410	0,5	—
450	464	5300	460	0,2	—
500	514	5700	510	0,2	—
600	614	5800	610	0,2	—
800	814	7500	810	0,1	—
1000	1015	9000	1010	0,1	—

\*\* Only on request for quantities to be agreed.



## CHARACTERISTICS

Binnenwand bijna glad. Zeer flexibel. **Standaard vlamdovend tot UL 94 VO.** Temperatuur bereik: -5° C - +60° C.

Inside surface almost smooth. Very flexible. **Self extinguishing according to UL 94 VO standards.** Temperature range: -5° C to +60° C.

Innenfläcne nahezu glatt. Hochflexibel. **Selbstlöschend gemäss UL 94 VO.** Temperaturbereich: von -5° C bis +60° C. **Fleksibel slangje. Temp.område: -5° C +60° C.**


## USE

Afzuiging van lucht, stoffen, spanen, gas en textiel.

Applications: air ducting, extraction of dust, fumes, gas, saw-dust, yarns.

Anwending: als Saug-und Gebläseschlauch für Luft, Staub, Dampf, Spänen, Garnfilamente.

Avsug og ventilasjonsslange for treforedling, tekstil og annen industri.

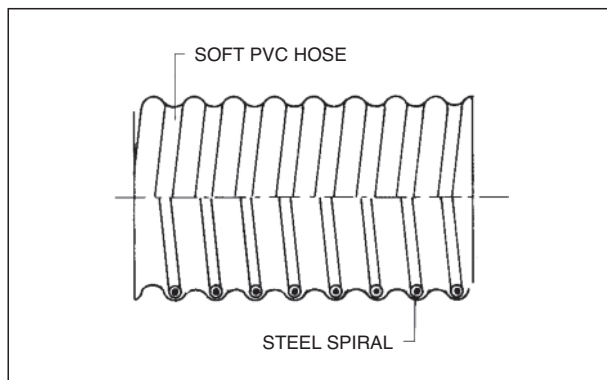

## STRUCTURE

Zacht PVC met ommantelde stalen spiraal  
**Soft PVC hose with coated steel wire spiral.**

Aus Weich-PVC mit Ummantelstahldrahtspirale.

PVC inn- og utvendig. PVC belagt stålspiral. Glatt innvendig, korrugert utvendig.