




Suitable for the contact with dry foodstuff in accordance with CE 1935/2004 (no simulating liquid is required).

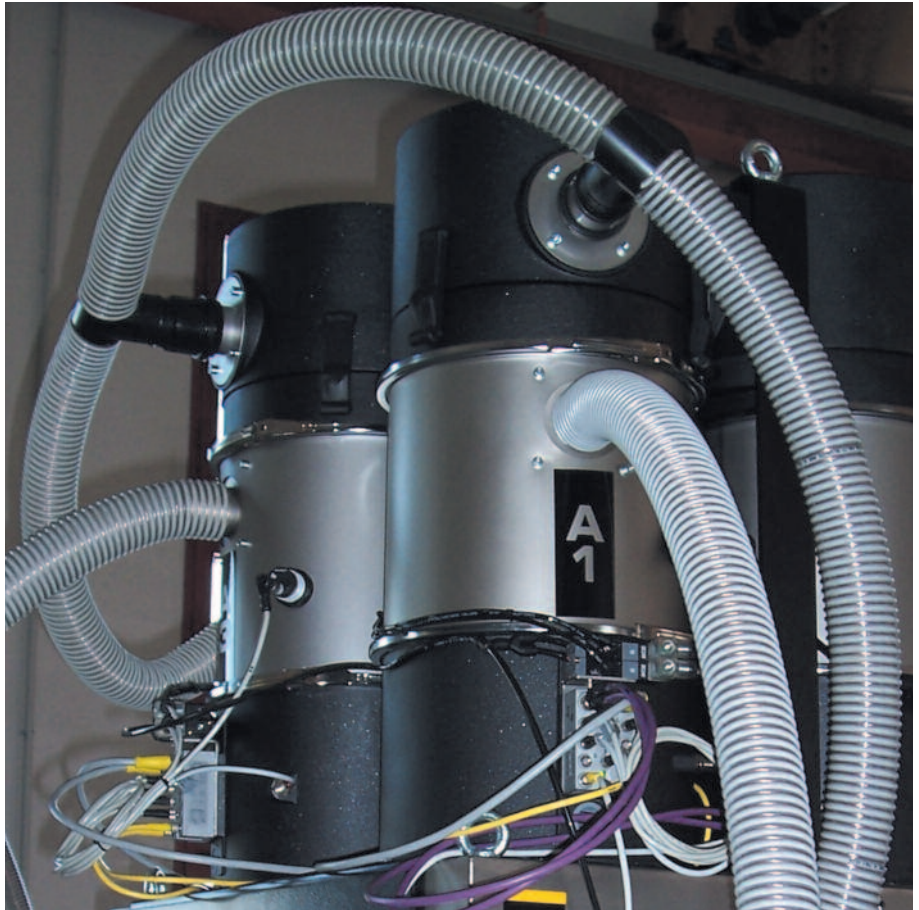

CHARACTERISTICS


Flexibele slang met gladde binnenwand.
 Temperatuurbereik: -25° C +85° C.
 Slijtvast, hoge mechanische bestendigheid.
 Flexible hose with smooth inside surface.
 Temperature -25° C +85° C.
 Optimum resistance to abrasion, perforation and cutting.
 Flexibler Schlauch mit glatter Innenseite.
 Temperatur: -25° C +85° C.
 Hervorragende Haltbarkeit gegen Abrasion, Perforation und Schnitt.
 Fleksibel slang som glatt innvendig.
 Temp. område: -25° C til +85° C.
 Optimal med hensyn til slitasje, deformering og kutt-skader.

USE

Zuigen en persen van slijtende materialen en granula-ten. Aardaansluiting door middel van mee gespira-liseerde koper draad.
 Flow, suction and delivery of abrasive and granular materials. Can be grounded by means of the copper spiral for an antistatic rendering.
 Durchfluss, Ansaugen und Durchleitung von scheuern-den und körnigen Materialien. Möglichkeit der Erdung über die Kupferspirale für die Antistatikausbeute.
 Suge-/trykkslange for slitende materialer og granulater. Kan jordes med kobber spiral for avledning av statisk elektrisitet.

Ø int. I. D. Innen Ø I.D. mm.	Buiten diameter O.D. A.D. U.D. mm.	wanddikte wall thickness Wandstärke Veggykkelse mm.	gewicht weight Gewicht Vekt gr/mtr.	buigradius bending radius Biegeradius Bøyeradius mm.	werkdruk working pressure Betriebsdruck Arb.trykk bar a 23° C	vacuum vacuum Unterdruck Vacuum m. H ₂ O	rollengte coil length Rollenlänge Std.lengde mtr.
40	47	3,5	420	80	0,4	3	20
50	57,4	3,7	550	100	0,4	3	20
60	69	4,5	630	120	0,4	3	20
70	80	5	850	140	0,3	3	20
76	86,2	5	900	150	0,3	3	20
80	90,5	5,2	950	160	0,3	3	20
90	101	5,5	1050	180	0,2	3	20
100	110,6	5,5	1150	200	0,2	3	20

STRUCTURE

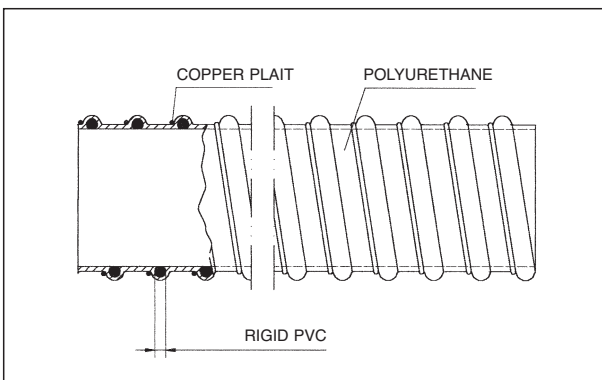

Polyurethaan met een schokwerend hard-PVC spiraal en koper spiraal.
 Polyurethane with rigid shock-resistant PVC spiral and copper plait.
 Aus Polyurethan mit fester Spirale aus stoßfestem PVC und Kupfergeflecht.
 PU slang med herdet PVC spiral og kopper spiral.