



Ø int. I. D. Innen Ø I.D. mm.	Ø ext. O. D. Aussen Ø U.D. mm.	werkdruk working pressure Betriebsdruck Arb.trykk bar a 23° C	barstdruk bursting press. Berstdruck Spr.trykk bar a 23° C	gewicht weight Gewicht Vekt gr./mtr.	rollengte coil length Rollenlänge Std.lengde mtr.
6	11	20	60	80	100
6	12	20	60	105	100
8	13	17	54	105	100
8	14	17	54	125	100
10	15	17	54	120	100
10	16	17	54	150	100
12	17	12	36	130	50
13	18	12	36	150	50
16	21	10	30	185	50
19	25	10	30	260	50
25	32	8	24	390	50
35	45	7	21	750	50
40	50	7	21	880	50


CHARACTERISTICS

Flexibele weerbestendige slang. Temperatur bereik: -5° C +60° C.
 Flexible hose resistant to weather conditions. Temperature range: -5° C +60° C.
 Flexibler Schlauch widerstandsfähig gegen Witterungseinflüsse.
 Temperaturbereich: -5° C +60° C.
 Fleksibel slang med god værbestandighet. Temp.område: -5° C +60° C.
 Næringsmiddelkvalitet.

USE

Doorvoer van koelvloeistoffen en chemische oplossingen.
 Applications: passage of cooling liquids, chemical solutions.
 Anwendung: zum Durchleiten von Abkühlmedien, Chemikalien.
 Trykkslange for trykkluft og transport av kjølevæsker og kjemiske blandinger i næringsmiddelindustrien.

STRUCTURE

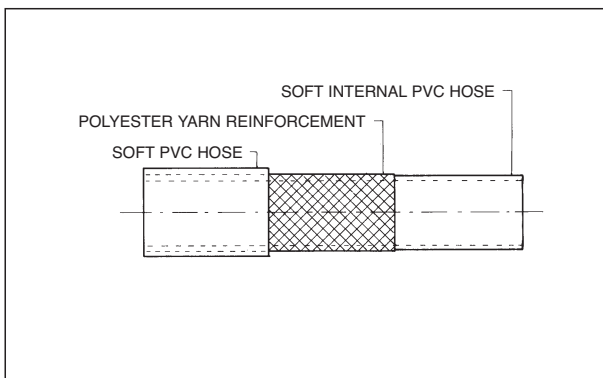

Zacht PVC met polyester inlage.
 Soft PVC hose with polyester yarn reinforcement.
 Weich -PVC-Schlauch mit Polyestergerarn-Einlage.
 Myk PVC slang med polyester armering. Glatt inn- og utvendig. Transparent.