



** Only on request for quantities to be agreed.



CHARACTERISTICS

Lijkt op een rubberslang. Zeer goed bestand tegen lage temperatuur en olie.

Performance, look and softness like conventional rubber. Excellent resistance to oils. Good abrasion resistance. Der Schlauch weist gewisse Eigenschaften wie Gummi auf, z.B. Aussehen, Flexibilität, gute Abriebsfestigkeit. Fleksibel slange med utseende og mykhet lik konvensjonell gummi slange. Meget oljebestendig. God slitasje egenskap.


USE

Perslucht.

Applications: compressed air.
Anwendung: für Druckluft.
Trykkslange for trykkluft.

Ø int. I. D. Innen Ø I.D. mm.	Ø ext. O. D. Aussen Ø U.D. mm.	werkdruk / working pressure Betriebsdruck / Arb.trykk			rollengte coil length Rollenlänge Std.lengde mtr.
		23° C bar	40° C bar	60° C bar	
5	10,5	15	11	7	100
6	12	15	11	7	100
8	15	15	11	7	100
10	15	15	11	7	100
12	17	15	11	7	100
13	19	10	7	4	100
15	21	10	7	4	100
16	23	10	7	4	100
19	26	10	7	4	60
25	33	10	7	4	60

STRUCTURE

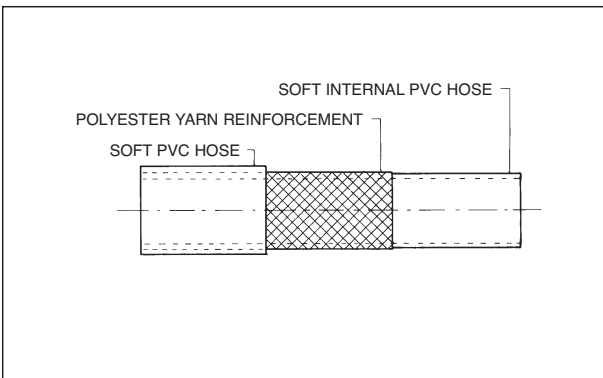

Gemaakt van speciaal kunststof met polyester inlage. Braiding reinforced hose made of a special plastics formulation. Aus einer speziellen Kunststoffrezeptur mit Polyestergerüst-Einlage. Speziell termoplastisch blanding inn- og utvendig. Polyester armering. Glatt inn- og utvendig.