



Suitable for the contact with foodstuff that requires a simulating liquid type A B-C in accordance with CE 1935/2004. Migration tests made at 40° C for 24 hours.

Ø int. I. D. Innen Ø I.D. mm.	Ø ext. O. D. Aussen Ø U.D. mm.	gewicht weight Gewicht Vekt gr./mtr.	werkdruk / working pressure Betriebsdruck / Arb.trykk			barstdruk burst press. Berstdruck Spr.trykk bar a 23° C	rollengte coil length Röllenlänge Std.lengde mtr.
			23° C bar	40° C bar	60° C bar		
4	10	80	20	16	12	60	100
5	11	90	20	16	12	60	100
6	11	80	20	16	12	60	100
6	12	105	20	16	12	60	100
6	14	145	20	16	12	60	100
7	13	115	20	16	12	60	100
8	13	105	18	13	9	54	100
8	14	125	18	13	9	54	100
8	17	220	18	13	9	54	100
9	15	135	18	13	9	54	100
10	15	120	18	13	9	54	100
10	16	150	18	13	9	54	100
12	17	130	12	9	6	36	50
12	18	180	12	9	6	36	50
13	18	150	12	9	6	36	50
13	19	175	12	9	6	36	50
15	21	215	10	7	4	30	50
15	23	280	10	7	4	30	50
16	21	185	10	7	4	30	50
16	22	210	10	7	4	30	50
19	25	260	10	7	4	30	50
19	26	300	10	7	4	30	50
22	30	420	8	5	3	24	50
25	32	390	8	5	3	24	50
25	33	450	8	5	3	24	50
30	38	560	8	5	3	24	50
32	42	660	8	4	2	24	50
35	45	750	8	4	2	24	50
38	48	870	8	4	2	24	50
40	50	880	8	4	2	24	50
45	55	1000	8	4	2	24	50
50	62	1350	8	4	2	24	25




CHARACTERISTICS

Flexibele weerbestendige slang. Temperatuur bereik: -5° C +60° C.
Flexible hose resistant to weather conditions. Temperature range: -5° C +60° C.
 Flexibler Schlauch widerstandsfähig gegen Witterungseinflüsse.
 Temperaturbereich: -5° C +60° C.
 Fleksibel slange med god værbestandighet. Temp.område: -5° C +60° C.
 Næringsmiddelkvalitet.

USE

Doorvoer van koelvloeistoffen en chemische oplossingen, in de levensmiddelen industrie, voor perslucht.
Applications: delivery of cooling liquids, chemical solutions, in the food and can industry, compressed air.
 Anwendung: zum Durchleiten von Abkühlmedien, Chemikalien, in der Lebensmittelindustrie, für Druckluft.
 Trykkslange for trykkluft og transport av kjølevæsker, kjemiske blandinger i næringsmiddelindustrien.

STRUCTURE

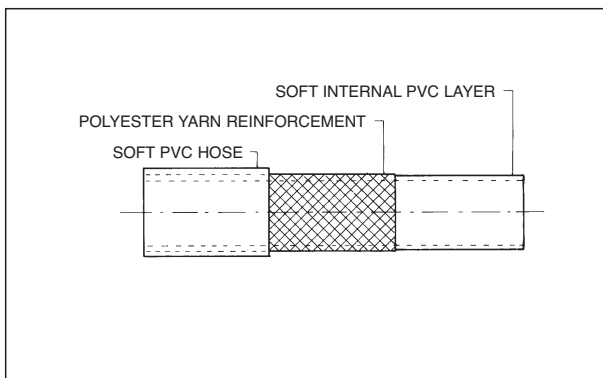

Zacht PVC met polyester inlage.
Soft PVC hose with polyester reinforcement.
 Weich-PVC-Schlauch mit Polyestergerüst-Einlage.
 Myk PVC slange med polyester armering. Glatt inn- og utvendig. Transparent.